

Nitrates Colorimetric Analyzer

Compact online analyzer for measurement of nitrates in water

APPLICATION FIELDS

- Drinking water
- Process optimisation of wastewater treatment plants
- Industrial and municipal wastewater
- Mineral water monitoring
- Surface water

ADVANTAGES / FEATURES

• Different compartments

To ensure complete separation between the electronics (upper case) and the wet part (lower case).

• Low reagents consumption

Minimum operating cost by small reagent consumption, only 4 L for the 16 mm cell, of each reagent every 30 days with 20 minutes analysis frequency.

• Automatic calibration / validation / cleaning

Validation, cleaning and calibration are standard features which significantly reduce downtime and operator intervention ensuring the most accurate results are obtained. Free selectable validation, cleaning and calibration intervals.

• Wide measuring range

The determination ranges of the Analyzer vary from 2 ppb to a maximum range of 25 ppm N-NO₃ (80 ppm NO₃) using internal dilution module.

• Factory tested, ready for installation and operation

Just connect the power, sample, and reagent lines and the analyzer is fully operational.




• Large color touchscreen

The colorimeter is equipped with a graphic touchscreen interface showing measured values and status information. Easy access to menus and functions. Integrated datalogger with USB download.

• Measurement principle


Both hydrazine and copper catalyst reagents are used to reduce Nitrate to Nitrite in a basic medium inside a heated reaction cell. A sulfanilamide and N-(1-naphthyl)-ethylene diammonium dichloride reagent is added to react with the Nitrite to form a purple colored compound. The absorbance intensity is proportional to the Nitrite concentration in the sample and is measured at 525 nm



TECHNICAL SPECIFICATIONS

Measured parameter	nitrates
Measuring principle	Differential colorimetric absorbance.
Measuring range	2 - 400 ppb N-NO ₃ (1.28 ppm NO ₃) (Ø 26 mm) 4 - 650 ppb N-NO ₃ (2.08 ppm NO ₃) (Ø 16 mm)
Reproducibility	± 2 ppb / ± 5% (Ø 26 mm) ± 5 ppb / ± 5% (Ø 16 mm)
Analysis Frequency	Freely programmable, batch near-continuous analysis.
Cycle time	11 minutes, including conditioning before analysis cycle and rinsing after measuring.
Termoregulation	Not necessary.
Sample	Pressure-free vessel Temperature: 5 - 50 °C (41 - 122 °F) Flow Rate: 80 to 500 mL/min Connection: 6 mm (¼-in.)
Drain	Pressure-free, atmospheric drain Connection: 12 mm (½-in.)
N° of streams	1, 2 with integrated switching valve
Dimensions (H x W x D)	604 x 380 x 242 mm (23.6 x 14.8 x 9.4 in)
Weight	Approx. 20 Kg (44 lbs)
Power Supply	Voltage: 100 - 240 VAC 50/60 Hz standard or 24 VDC (option) Power consumption: max. 80 VA
Outputs	2 x 4-20 mA outputs for measured data Modbus RTU RS485
Alarms	2 SPDT programmable potential free relays
Digital Input	Remote start/stop, start extra cycle, skip idle time, emergency stop
Working Temperature	5 - 45 °C (41 - 113 °F)
Humidity	10 to 90% RH (indoor use only)
Installation	Wall mount (standard), bench top support or panel mount (options).
Protection Grade	IP54

INSTALLATION EXAMPLE

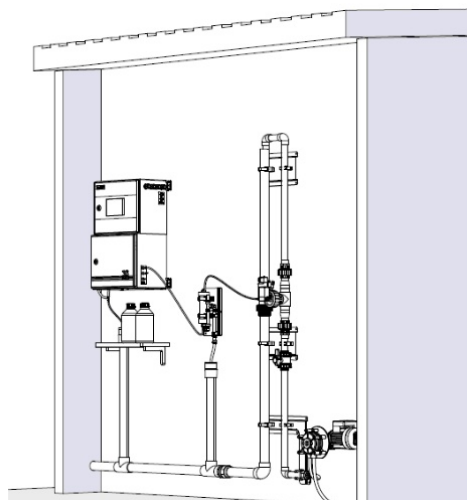

The analyzer is easily installed in a minimum amount of wall space.


In the picture are included the optional accessories:

- a) A46ERLS000 - Fast Loop external reservoir with level switch
- b) A46SF10020 - Filtration unit 100 micron 230 VAC (other mesh size and input voltages available)
- c) A46SPP0000 - Sampling Pump


Other accessories, including external dilutors to increase the analyzer range and different kind of sample reservoirs are also available. See our website for more info.



TECHNICAL DRAWING

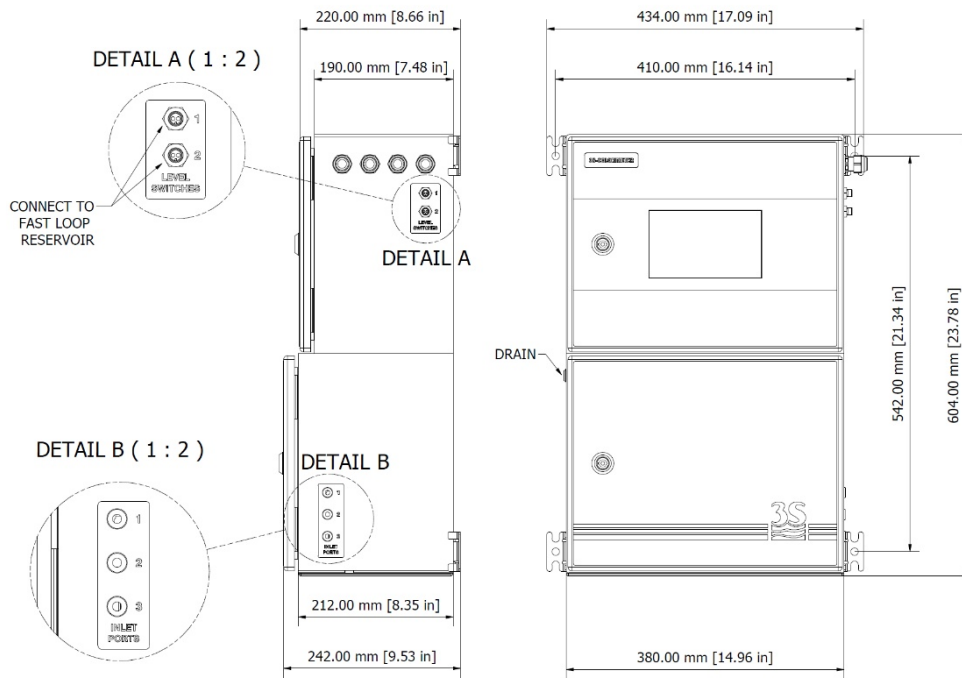

HYDRAULIC COMPARTMENT VIEW

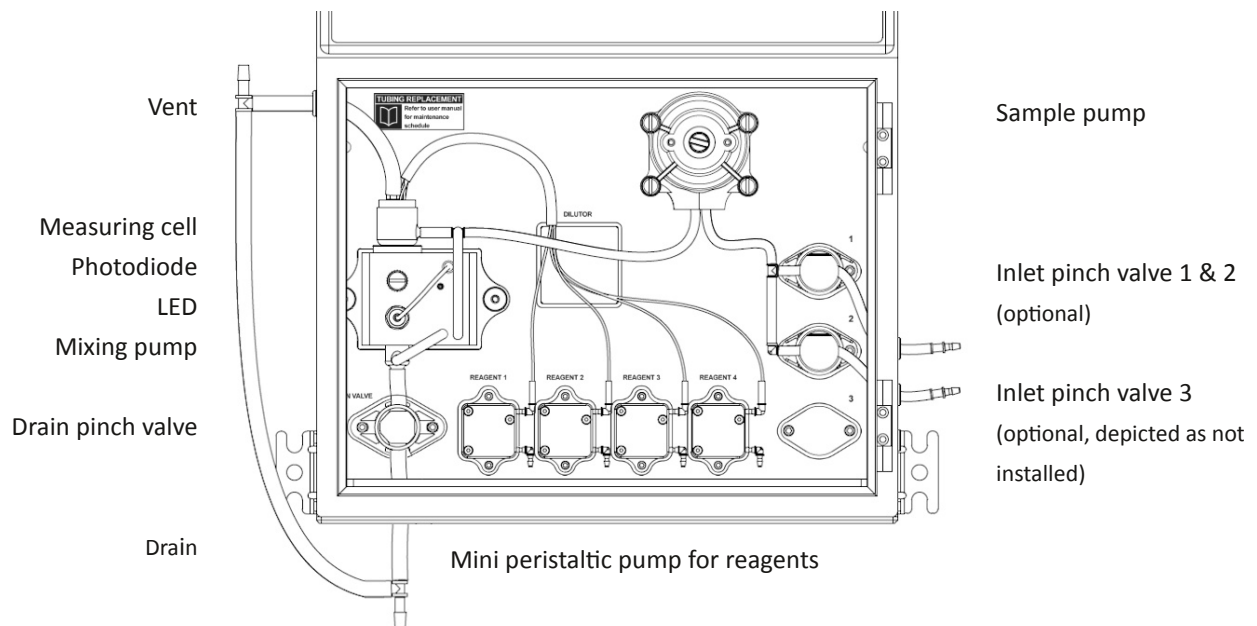

PRODUCT CODES

CL3-3-525-0-16-NO3	Colorimeter, one inlet port, 16 mm cell
CL3-3-525-2-16-NO3	Colorimeter, two inlet ports, 16 mm cell
CL3-3-525-3-16-NO3	Colorimeter, three inlet ports, 16 mm cell
CL3-3-525-0-26-NO3	Colorimeter, one inlet port, 26 mm cell
CL3-3-525-2-26-NO3	Colorimeter, two inlet ports, 26 mm cell
CL3-3-525-3-26-NO3	Colorimeter, three inlet ports, 26 mm cell